





Relay

Contact Ratings
 5 Amps @ 30VDC/240VAC
 Double Pole, Gen. Purpose
 3 Amps @ 30VDC/240VAC
 Four Pole, General Purpose
 1 Amps @ 120 VAC
 Inductive (CosØ=.35)
 1/4HP @ 240VAC Motor

Specifications
 Pick-Up Voltage:
 75% of Rated Voltage
 Drop-Out Voltage:
 30% of rated AC Voltage
 10% of rated DC Voltage
 Max. Voltage:
 110% of rated Voltage
 Operating Time:
 20 milliseconds
 Coil Power:
 1.9VA 50Hz
 1.7VA 60Hz
 1.2W DC
 Temperature Rating:
 -10°C to 40°C
 Contact Material:
 Silver (Ag)
 Contact Resistance:
 <0.050 Ohms (before use)
 Minimum Operating Current:
 5mA@24VDC
 Life: Mechanical:
 50,000,000 Operations
 Electrical:
 600,000 Operations


Ordering Information

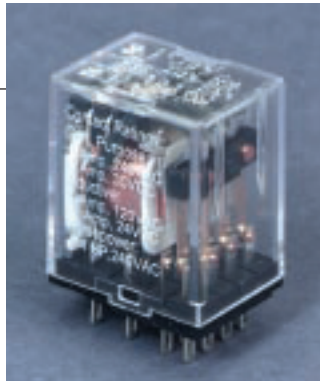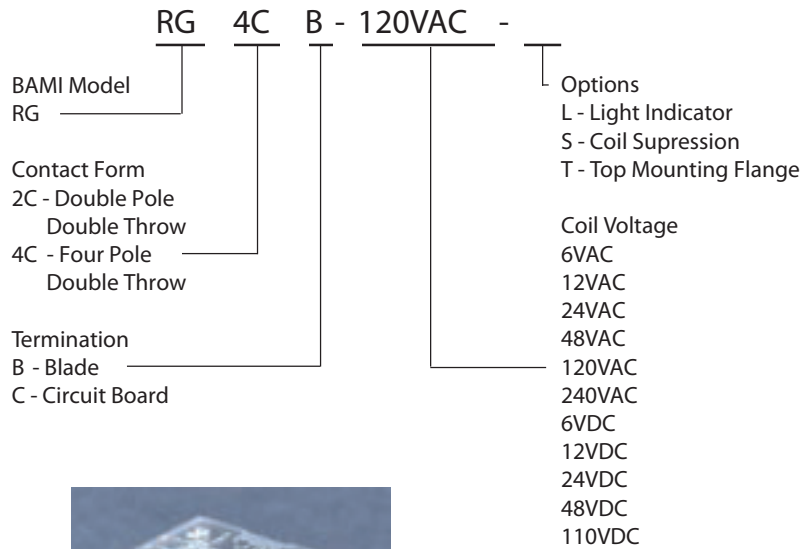



Socket

Specifications
 Current Rating: 5 Amps
 Voltage Rating: 250VAC
 Mounting: DIN or Surface

Dimensions

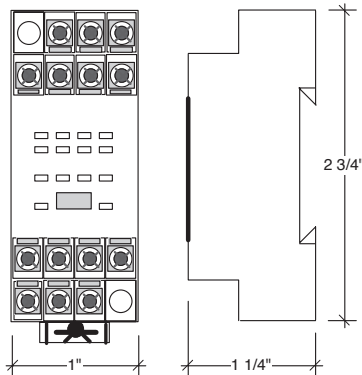

Connections

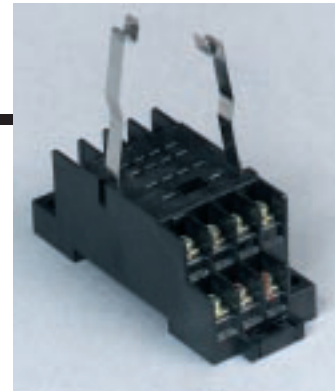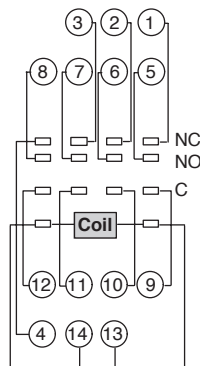

Ordering Information

